



VISLINK

At the heart of the action.

LiveStream Datasheet

LiveStream

Multi-mode Video Content
Transmission Platform

ENG Microwave

IP Streaming



LiveStream is a live content video collection platform capable of supporting multi-mode ENG and OB operations. With support for multiple transmission modes, LiveStream maximizes quality of service, enabling the delivery of highly reliable live news feeds under the most challenging of circumstances.

Key features

- User-friendly front panel control
- H.264 AVC 4:2:0 HD/SD Encoding
- Multiple frequency or video presets
- Space-efficient two rack unit

Typical applications

- Electronic newsgathering
- OB Productions

The LiveStream Advantage

Compact:

- Space-efficient 2RU x 19" EIA all-inclusive rack mount design for OB/ENG control.

Backward Compatibility:

- Use existing ENG Nycoil Assemblies configured for Type 'N', TNC & Triax connections.

Expandable:

- Purchase a LiveStream system initially configured for single operation and then can add IP Input or AC protection, as production needs change.

Space Efficient ENG ODU:

- 2, 7 or 2/7 GHz mast-mounted single enclosure.

HD/SD Broadcast Video Quality:

- Bandwidth-efficient H.264 (AVC) encoding available in 4:2:0

High RF Performance:

- High RF output linear broadband amplifier that minimizes out-of-band spectral interference.

Efficient Design:

- Modular design for ease of upgrades



VISLINK


E: sales@vislink.com

T: +1 908 852 3700 / +44 1442 431300

Learn more at www.vislink.com

Configurable Touchscreen

- Easy-to-read operator screen
- Ethernet output
- RF Channel and sep. video preset
- DVB T-2 capable

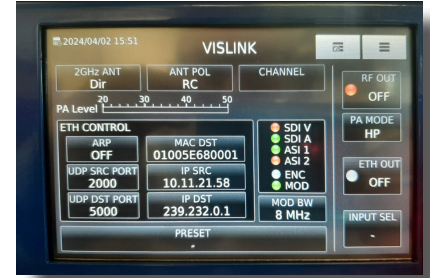

Live Stream - Specifications

Outdoor Unit (ODU) RF

2.0-2.5 GHz	Mast Mounted - Single enclosure
6.4-7.1GHz	7 Watts (typ.) +/- 1dB @ QPSK, 64 QAM
IDU to ODU Interconnection	1 Watts (typ.) +/- 1dB @ QPSK, 64 QAM
RF Connections	N Type, TNC or Triax
Size and Weight	2 GHz - 2 x N Type (Omni + Parabolic - Switchable) 7GHz - 1 x N Type
Enviromental	13.9 (W) x 25.2 (L) x 14.2(H) cm (5.5" (W) x 9.9" (L) x 5.9" (H) 5.3kg (11.7lbs.) max. @2/7GHz
	Operating Temperature: -35°C to 50°C, (-31°F to 122°F) Humidity: 95% long term

Indoor Unit (IDU)

	Rack Mounted Chassis, 2U
Operator Controls	Touch Screen Display, Physical on-off push button switch
Display	Capacitive colour touch TFT 12.7cm (5.0") diagonal 800 x 400 White LED backlight
Presets	User Configurable
Rear Panel I/O	2 x Coaxial Din - ASI In / Out N Type, TNC or Triax 4 x SFP - Input/Output 2 x RJ45 IEC - 110 - 230Vac
Size and Weight	43.1 (W) x 34.2 (L) x 8.9(H) cm (17.0" (W) x 16.2" (L) x 3.5" (H) 2RU 19" EIA Standard rack mounted 5.4kg (11.9lbs.)
Operating Power	115/230VAC, 2.0A (typ.) Optional 20-75Vdc
Environmental	Operating Temperature: -10°C to 40°C, (14°F to 104°F) Humidity: 95% long term

Modulation - DVB-T

Modulation	QPSK, 16QAM, 64QAM
Guard Interval	1/4, 1/8, 1/16, 1/32
Forward Error Correction	1/2, 2/3, 3/4, 5/6, 7/8
DFT	2K

Modulation - DVB-T2

Modulation	QPSK, 16QAM, 64QAM, 256QAM
Guard Interval	1/4, 19/128, 1/8, 19/256, 1/16, 1/32, 1/128
Forward Error Correction	1/2, 3/5, 2/3, 3/4, 4/5, 5/6
DFT	2K



Video Encoding

Formats	720 × 480i (NTSC) , 720 × 576i (PAL) 720p 50p, 59.94p, 60p 1080i 50,59.94, 60 1080p 24,23.98,
Chroma Sampling	4:2:0 8-Bit
Codec	H.264
Bit Rate	2-24 Mb/s

Audio Encoding

Standard	MPEG-1 Layer2, 2-channels
Channels	2
Bit Rate	96, 112, 128, 160, 192, 224, 256, 320, 384 Kb/s

Audio Inputs

Analogue	2 Mono Balanced
Embedded	SDI embedded audio x 1
AES3	1 Stereo balanced and isolated from ground

Optional IP Input

Ethernet Port Via SFP	1
ASI Port Via SFP	1
ASI Packet Size	188/204

© Copyright 2024 Vislink Technologies, Inc. All rights reserved. All other products or services referenced herein are identified by the trademarks or service marks of their respective companies or organizations. We reserve the right to change specifications without notice. Where applicable, versions of this device may not have been approved by the Federal Communications Commission (FCC). Where applicable, these versions are not offered for sale or lease until approval of the FCC has been obtained.

